
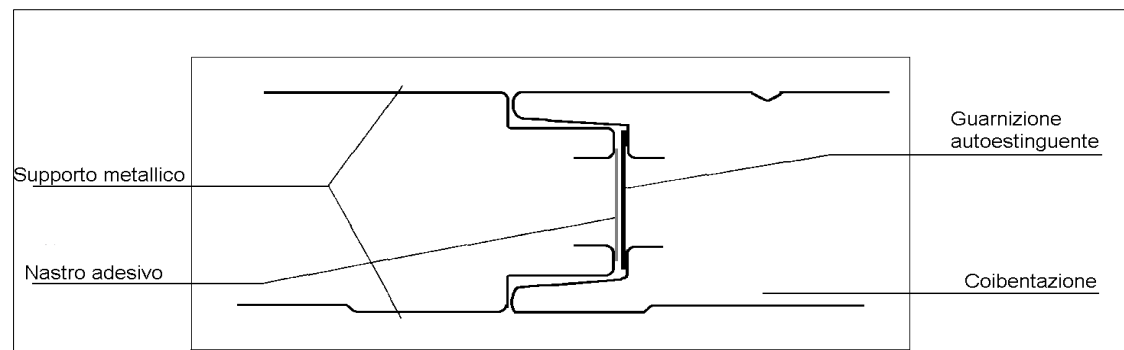


## Pannello Coibentato per parete Mod. ALFA 2



**SPESSORI mm. 25/ 30/ 35/ 40/ 50/ 80/ 100**

Freccia F  $\leq 1/200 L$   
 Valori portate  $< Kg/m 200^2$

Sp.Pann.	Sp. Sup.	Peso	K	CARICO MASSIMO UNIFORMEMENTE DISTRIBUITO IN Kg/m <sup>2</sup> ACCIAIO														
				Distanza fra gli appoggi in metri														
				Campata semplice					Campata multipla									
mm.	mm.	Kg/ m <sup>2</sup>	Kcal/ mqh °C	▲▲	2	2,5	3	3,5	4	▲▲▲▲	2	2,5	3	3,5	4	4,5	5	
25	0,5	9,31	0,675	▲▲	100	55					▲▲▲▲	155	85					
	0,6	10,98		107	59						166	91	62					
30	0,5	9,50	0,575	▲▲	150	80	50				▲▲▲▲	198	125	75				
	0,6	11,17		161	86	54					134	80						
35	0,5	9,69	0,501	▲▲	170	100	65				▲▲▲▲	155	96	60				
	0,6	11,36		182	107	70	50				166	103	64					
40	0,5	9,88	0,444	▲▲		143	95	58	40		▲▲▲▲			130	92	65	45	
	0,6	11,55			153	102	62	43				139	98	70	48			
50	0,5	10,26	0,362	▲▲		175	130	88	65		▲▲▲▲			179	134	95	65	50
	0,6	11,93			187	139	94	70				192	144	102	70	54		
80	0,5	11,4	0,26	▲▲	350	250	190	150	120		▲▲▲▲	565	435	325	242	185	140	115
	0,6	13,07		370	270	210	161	128			580	452	343	265	198	150	123	
100	0,5	12,16	0,21	▲▲	450	300	230	168	145		▲▲▲▲	640	490	390	300	240	190	155
	0,6	13,83		470	320	250	188	165			658	512	405	312	258	200	160	

= materiale disponibile a magazzino