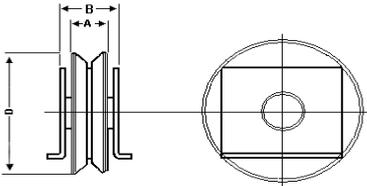
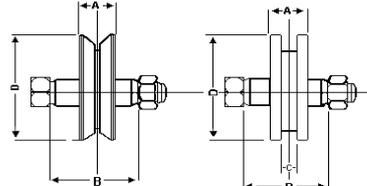
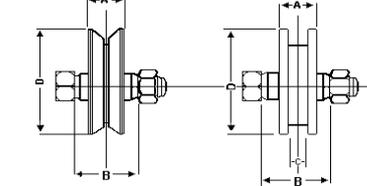
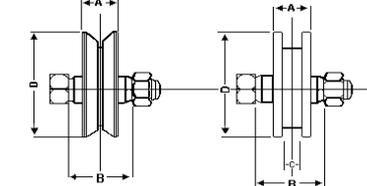


## Ruote ( in acciaio tornito e zincato)

		Caratteristiche			
	<b>Ruote con supporto a saldare</b>				
	D	A	B	portata kg.	
	<b>80</b>	<b>20</b>	<b>34</b>	<b>210</b>	
	<b>90</b>	<b>20</b>	<b>34</b>	<b>210</b>	
	<b>100</b>	<b>20</b>	<b>34</b>	<b>210</b>	
	<b>120</b>	<b>20</b>	<b>34</b>	<b>210</b>	
	<b>Ruota ridotta con 1 cuscinetto</b>				
	D	A	B	C portata kg.	
	<b>60</b>	<b>20</b>	<b>43</b>	<b>8</b> <b>180</b>	
	<b>80</b>	<b>20</b>	<b>43</b>	<b>8</b> <b>280</b>	
	<b>90</b>	<b>20</b>	<b>43</b>	<b>8</b> <b>280</b>	
	<b>100</b>	<b>20</b>	<b>43</b>	<b>8</b> <b>280</b>	
	<b>120</b>	<b>20</b>	<b>43</b>	<b>8</b> <b>280</b>	
	<b>Ruota con 1 cuscinetto</b>				
	D	A	B	C portata kg.	
	<b>80</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>300</b>	
	<b>100</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>300</b>	
	<b>120</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>350</b>	
	<b>130</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>350</b>	
	<b>150</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>350</b>	
	<b>160</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>350</b>	
	<b>200</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>400</b>	
	<b>Ruota con 2 cuscinetti</b>				
	D	A	B	C portata kg.	
	<b>100</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>600</b>	
	<b>120</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>600</b>	
	<b>130</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>600</b>	
	<b>150</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>800</b>	
	<b>160</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>800</b>	
	<b>200</b>	<b>30</b>	<b>43</b>	<b>18</b> <b>800</b>	
<b>250</b>	<b>40</b>	<b>53</b>	<b>18</b> <b>1000</b>		