
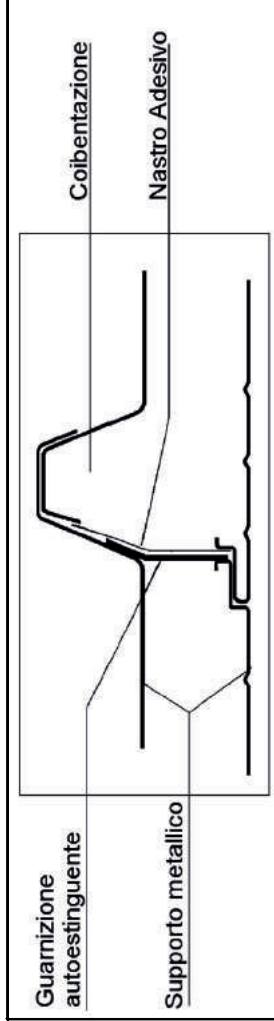


PANNELLO COIBENTATO PER COPERTURA

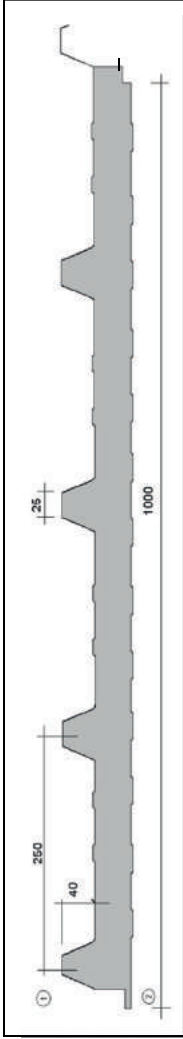

Freccia F $\geq 1/200$ L
 Valori portate $\geq \text{kg/m}^2 \cdot 300$

SP.PANN. mm.	SP.SUP. mm.	PESO Kg/ m ²	K Kcal/ mqh °C	CARICO MASSIMO UNIFORMEMENTE DISTRIBUITO IN Kg/m ² ACCIAIO									
				Distanza fra gli appoggi in metri									
				CAMPATA SEMPLICE					CAMPATA MULTIPLA				
2	2,5	3	3,5	4	2	2,5	3	3,5	4	4,5	5		
30	0,4	8,42	0,515	143	97	63	43	148	106	77	52	36	
40	0,4	8,80	0,407	169	126	91	63	188	133	97	74	52	
50	0,4	9,18	0,337	197	151	114	80	216	167	122	90	68	
	0,4											47	
												37	

= materiale disponibile a magazzino